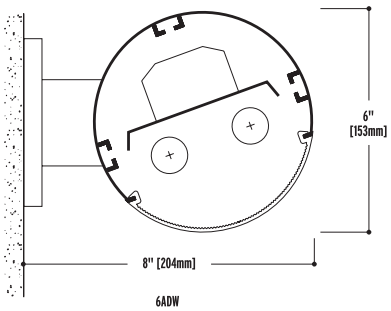



CIRQUE 6-AIW 6-ADW

DIRECT-INDIRECT

- Fixed angle semi-indirect / direct light distribution.
- Extruded aluminum housing.
- Nominal 3′, 4′, 6′ and 8′ illuminated sections.
- Runs to any length and configuration.
- Diffusers – radial baffle and/or acrylic ribbed lens
- Die cast end caps.
- Custom finishes available by special order.

Construction
Extruded aluminum housing. Nominal 3′, 4′, 6′ or 8′ illuminated sections.

End Caps
Die-cast aluminum.

Shielding
Clear ribbed acrylic lens or contoured baffle.

Electrical
120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish
Durable, low gloss, white, powder coated acrylic finish.

Mounting
Fixture mounts directly to existing structure over a 2″x 4″ standard electrical box **mounted horizontally** in the wall.

ORDERING INFORMATION:
Sample number: 6AIW-1T8-80-1EB-SI-S14

Series
6=Cirque

Light Output
AD=Angle-Direct **AI**=Angle-Indirect

Mounting
W=Wall

Number of Lamps (per cross section) (not included)
1=1 Lamp **2**=2 Lamps

Lamp Type
T8 **T5** **T5HO**

Run Length
Overall Nominal Run Length__ft. (Any combination of 8′, 6′, 4′ and 3′ sections)

Voltage [1]
1=120V **2**=277V **3**=347V **U**=Universal

Ballast
EB=Electronic Ballast (Standard) **DB**=Dimming Ballast

Switching
SI=Single Switching **DU**=Dual Switching

Emergency
EM=Emergency Pack (Consult Factory)

Fusing
GLR **GMF**

Shielding (Available for 83 and 89 only)
S14=Contoured Baffle **S26**=Clear Ribbed Acrylic Lens

1 Due to various constraints, some options may not be combined with others.

MOUNTING INFORMATION

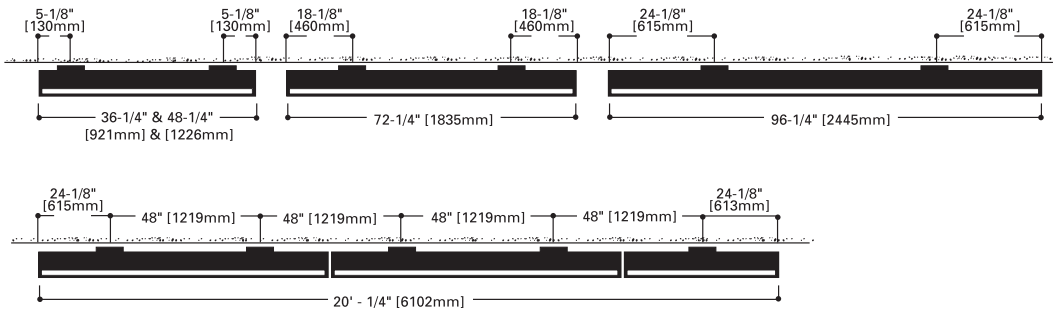

Rows are configured prior to placement of order from standard 3',4',6' & 8' sections to nearest 1' increments with Beginning, Intermediate and End of run fixtures. Welded ends insure rugged construction but are not able to be reconfigured in field.

9" x 9" CORNER

Patterns are constructed from rows with 9" non-illuminated corners. Corners contain the specified diffuser but, **Corners are not illuminated**.

S14 Round Baffle

S26 Acrylic Lens

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.